
Construction Detail

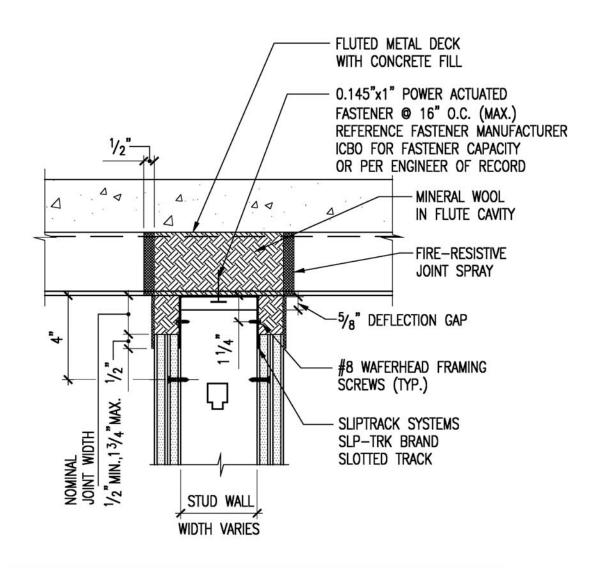

NOTES:

- 1. Cyclical Design UL 2079 Test Standard
- 2. Do Not screw drywall to slotted track.
- 3. All UL Head of Wall Designs vary in nominal joint width. Reference UL directory for specific information based on your selected UL system.
- 4. Systems vary in movement capability.

STANDARD DETAIL HEAD OF WALL PERPENDICULAR TO FLUTE

1

SYSTEM 7-19 FIRE RATED DESIGN UL-2079 TEST STD.



File Code - Date: 3/15/11



Submittal Sheet

Project:	Architect:
Spec. Ref.: Section [09110] [0911	11] [05400] Date:

Sheet Title:

System 7-19 Fire Rated Design Standard Detail Head of Wall Perpendicular to Flute.

Product: SLP-TRK®

Manufacturer: SlipTrack Systems

Description:

SLP-TRK Standard Detail SLP-TRK® Brand Slotted Top Track.

Deflection - 1 inch

References:

- UL-2079 Cyclical Design
- ICC ESR-1042
- OSHPD R-0371-Fixed Equip. Anchorage
- LA City No. RR25344
- NY City MEA 285-01-M
- UL-R19236

Assembly Components:

Head-of-wall Track:

- Manufacturer: SlipTrack Systems
- Model: SLP-TRK®
- Material: minimum 25 ga steel, slotted
- Width: to match steel stud


Notes:

- All connections to the structure shall be approved by the project engineer of record.
- All UL Head of Wall Designs vary in nominal joint width. Reference UL directory for specification information based on your selected UL system.
- Reference UL Listings (HW-D-0043 sim.) for UL-2079 Design of Choice.





for Use in Joint Systems See UL Fire Resistive Directory

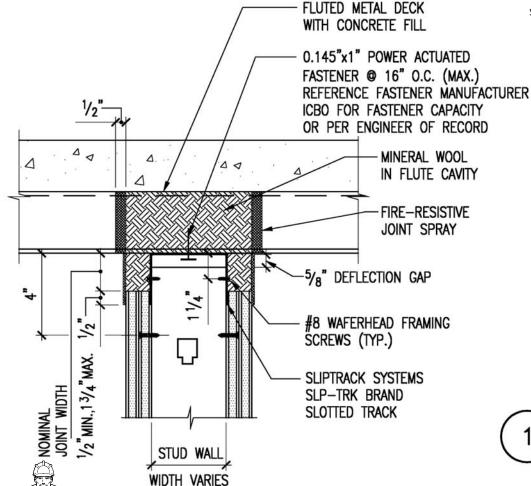

Building a Better Way.



File Code - Date: 3/15/11