

**NOTE:**  
FOR APPLICABLE NOTES  
SEE STANDARD DETAILS  
1 THROUGH 3

## HEAD OF WALL CHASE WALL

SYSTEM 7-19 FIRE RATED DESIGN UL-2079 TEST STD.

5



Building a Better Way.

File Code - Date: 3/15/11

1-888-4SLPTRK [1-888-475-7875]

www.sliptrack.com



Project: \_\_\_\_\_ Architect: \_\_\_\_\_

Spec. Ref.: Section [09110] [09111] [05400] Date: \_\_\_\_\_

Sheet Title:

System 7-19 Fire Rated Design  
Head of Wall Chase Wall.

Product: SLP-TRK®

Manufacturer: SlipTrack Systems

Description:

SLP-TRK Standard Detail  
SLP-TRK® Brand Slotted Top Track.

Deflection - 1 inch



Track Only

Light Gauge Framing  
for Use In Joint Systems  
See UL Fire Resistive Directory

References:

- UL-2079 Cyclical Design
- ICC ESR-1042
- OSHPD R-0371-Fixed Equip. Anchorage
- LA City - No. RR25344
- NY City - MEA 285-01-M
- UL-R19236


Assembly Components:

Head-of-wall Track:

- Manufacturer: SlipTrack Systems
- Model: SLP-TRK®
- Material: minimum 25 ga steel, slotted
- Width: to match steel stud

Notes:

- All connections to the structure shall be approved by the project engineer of record.
- All UL Head of Wall Designs vary in nominal joint width. Reference UL directory for specification information based on your selected UL system.
- Alternate Fire-Rated Design Detail - Seek "Project Team of Record" Approval prior to Installation. This detail has been provided to assist the project team with issues of constructability. UL-2079 Tested Assembly, Design Intent see perpendicular detail for standard assembly.
- Reference UL Listings (HW-D-0043 sim.) for UL-2079 Design of Choice.

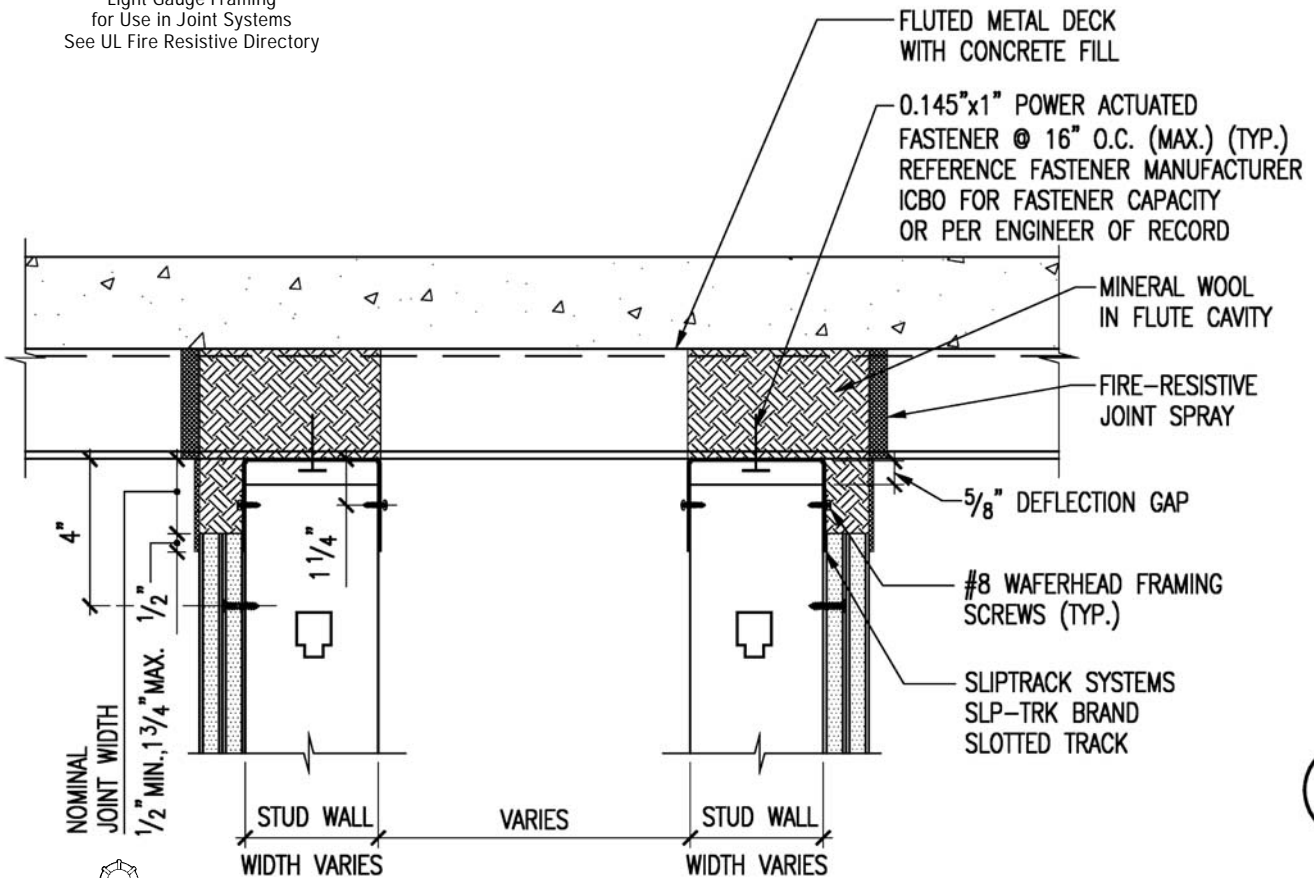

5



Building a Better Way.

File Code - Date: 3/15/11

1-888-4SLPTRK [1-888-475-7875]

www.sliptrack.com